

USB-C CABLE TEST GUIDE


Test guide for Lightware UCX and Full-Featured Type-C cables

Cable	USB2.0 enumeration	USB3.x enumeration	Power delivery	DisplayPort Alt mode	Ethernet
CAB-USBC-T100A	✓	✓	✓	✓	✓
CAB-USBC-T200A / T200C	✓	✓	✓	✓	✓
CAB-USBC-T300A / T300C	✓	✓	✓	✓	✓
CAB-USBC-T400B	✓	✓	✓	✓	✓
CAB-USBC-T500B	✓	✓	✓	✓	✓
Lanberg CA-CMCM-31CU-0030-BK	✓	✓	✓	✗	✓
Apple USB-C Charge Cable	✓	✗	✓	✗	✓

Please record the host computer brand, type, chipset, operational system and video card type e.g.
Apple Macbook Air M1 16GB macOS Big Sur 11.5.2



Result: ✓ / ✗

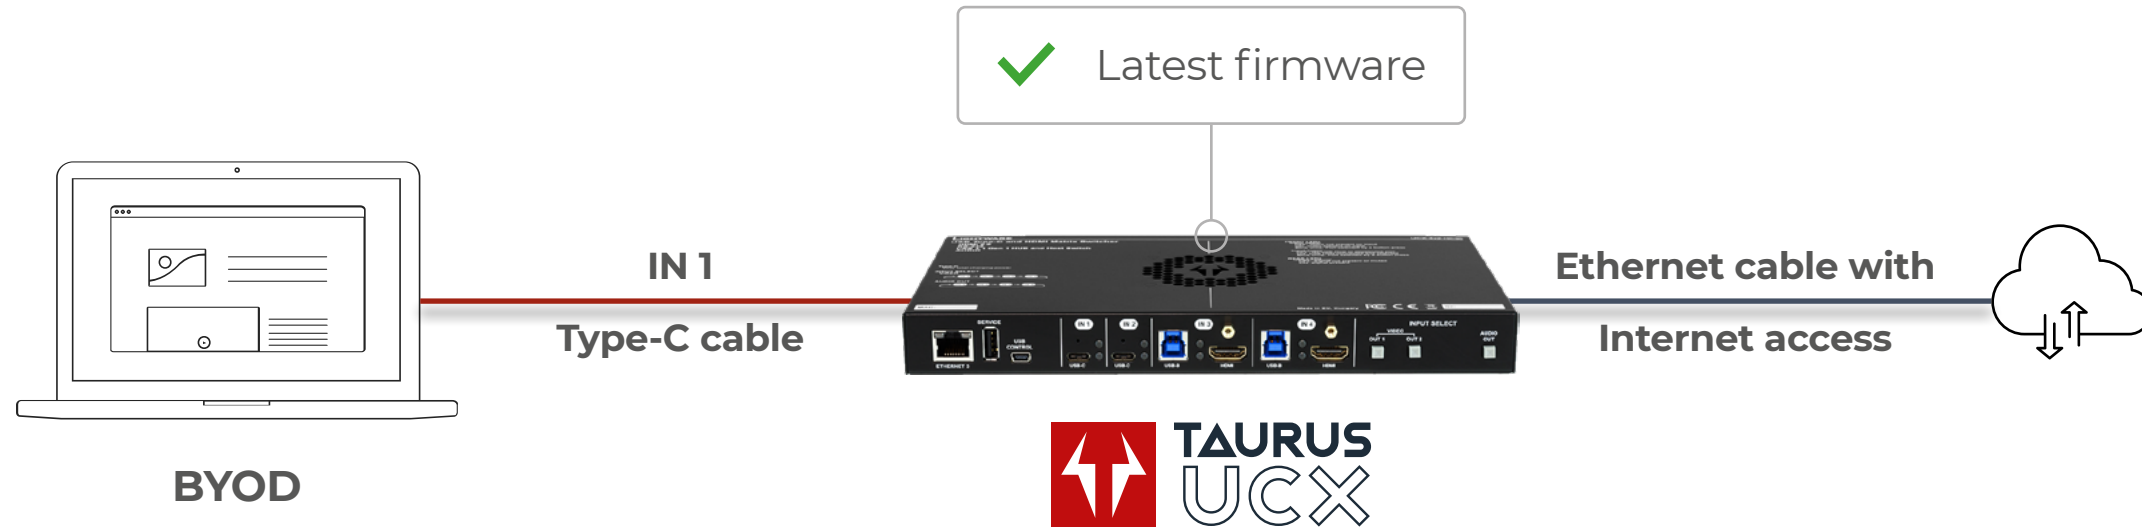

- ✓ Connect the BYOD's USB-C connector directly (no HUB or docking station) to UCX
- ✓ For BYOD on Windows, install the USB Device Tree Viewer utility:
https://www.uwe-sieber.de/files/UsbTreeView_x64.zip
- ✓ For BYOD on macOS, it is not necessary to install a utility
- ✓ Connect to UCX with Lightware Device Controller. Use the latest version.



PREPARATION FOR TESTING USB 2.0 AND USB 3.X ENUMERATION

- ✓ (1) By clicking on the USB-C HOST 1 icon in USB crosspoint tab results that USB Upstream Port 1 properties window opens
- ✓ (2) Set the DisplayPort Alternate Mode to Prefer USB 3.1

The screenshot shows the Lightware Device Controller interface. The top navigation bar includes 'CROSSPOINTS', 'EDID MANAGEMENT', 'CONTROL', 'SETTINGS', and 'Device Discovery'. The main area is divided into 'Video & Audio' and 'USB' tabs. Under the 'USB' tab, there are four USB-C HOST ports (U1, U2, U3, U4) and a USB HUB (H1). A red box highlights the 'USB-C HOST 1' icon, with a red circle containing the number '1' next to it. On the right side, the 'USB UPSTREAM PORT 1 - USB-C HOST 1' settings window is open. The 'GENERAL' section shows 'Port name: USB-C Host 1', 'Lock: Lock', 'Connected: True', and 'USB-C Power Limit: Port 1 maximum, Port 2 minimum'. The 'SETTINGS' section shows 'Host Supports DP Alt Mode: True', 'Active Alternate Mode: DP', and 'Active DP Alternate Mode Pins: Pin Assignment D'. A red box highlights the 'DP Alternate Mode Policy' dropdown menu, which is set to 'Prefer USB3.1', with a red circle containing the number '2' next to it. Below this, other settings like 'Charging state: Charging', 'VBUS Voltage: 4.80 V', 'Nominal VBUS Voltage: 5.00 V', 'Max VBUS Current: 3.00 A', 'Active Port Data Role: UFP', 'Active Port Power Role: Source', and 'Port Power Role: Dual Role' are visible.





TESTING USB 2.0 ENUMERATION ON WINDOWS BYOD

- ✓ Open on Windows BYOD the USB Device Tree Viewer utility
- ✓ (1) Locate the UCX USB2.0 HUB Name: Generic USB 2.1 HUB Vendor ID: 0x04B4 (Cypress Semiconductor)
- ✓ (2) If the hub is visible and the Device Connection Speed is High-Speed, **USB 2.0** enumeration works ✓

The screenshot shows the USB Device Tree Viewer V3.5.1 interface. On the left, a tree view shows the USB Root Hub (USB 3.0) expanded to show its ports. Port 3 is highlighted with a red box and labeled 'The USB2.0 HUB of UCX'. On the right, the properties for 'USB Port3' are displayed. Two red circles with numbers 1 and 2 point to the 'Vendor ID' and 'Device Connection Speed' fields, respectively. The Vendor ID is '0x04B4 (Cypress Semiconductor)' and the Device Connection Speed is 'High-Speed'. Below the properties, a 'Device Information' section provides detailed technical specifications for the 'Generic USB Hub'.

USB Port3	
Connection Status	: 0x01 (Device is connected)
Port Chain	: 2-1-3
----- Summary -----	
Vendor ID	: 0x04B4 (Cypress Semiconductor)
Product ID	: 0x6506
USB version	: 2.10
Port maximum Speed	: High-Speed
Device maximum Speed	: SuperSpeed
Device Connection Speed	: High-Speed
Self Powered	: yes
Demanded Current	: 0 mA
Used Endpoints	: 2
----- USB Hub -----	
+++++ Device Information +++++	
Device Description	: Generic USB Hub
Device Path	: \\?\USB\VID_04B4&PID_6506\MSFT20123456789A#{f18a0e88-c30c-11d0-8815-000000000000}
Kernel Name	: \Device\USBPDO-7
Device ID	: USB\VID_04B4&PID_6506\MSFT20123456789A
Hardware IDs	: USB\VID_04B4&PID_6506&REV_5000 USB\VID_04B4&PID_6506
Driver KeyName	: {36fc9e60-c465-11cf-8056-444553540000}\0009 (GUID_DEVCLASS_USB)
Driver	: \SystemRoot\System32\drivers\UsbHub3.sys (Version: 10.0.19041.964 Da
Driver Inf	: C:\WINDOWS\inf\usbhub3.inf
Legacy BusType	: PNPBus
Class	: USB
Class GUID	: {36fc9e60-c465-11cf-8056-444553540000} (GUID_DEVCLASS_USB)
Service	: USBHUB3
Enumerator	: USB
Location Info	: Port_#0003.Hub_#0003
Location IDs	: PCIROOT(0)#PCI(1C04)#PCI(0000)#PCI(0200)#PCI(0000)#USBROOT(0)#USB(1)#
Container ID	: {708e857d-a10c-11eb-93fd-806e6f6e6963}
Manufacturer Info	: (Standard USB HUBs)
Capabilities	: 0x90 (UniqueID, SurpriseRemovalOK)
Status	: 0x0180200A (DN_DRIVER_LOADED, DN_STARTED, DN_DISABLEABLE, DN_NT_ENUME
Problem Code	: 0
Address	: 3

The USB2.0 HUB of UCX





TESTING USB 3.X ENUMERATION ON WINDOWS BYOD

- ✓ Open on Windows BYOD the USB Device Tree Viewer utility
- ✓ **(1)** Locate the UCX USB3.x HUB
Name: Generic SuperSpeed USB
HUB Vendor ID: 0x04B4
(Cypress Semiconductor)
- ✓ **(2)** If the hub is visible and the Device Connection Speed is SuperSpeed, **USB3.x** numeration works ✓

USB Device Tree Viewer V3.5.1

My Computer

- Intel(R) USB 3.1 eXtensible Host Controller - 1.10 (Microsoft)
- USB Root Hub (USB 3.0)
- [Port1]
- [Port2]
- [Port3] : USB Composite Device - Keyboard, Mouse, 2x HID
- [Port4] : USB Composite Device - Keyboard, Mouse, 2x HID
- [Port5]
- [Port6]
- [Port7]
- [Port8]
- [Port9]
- [Port10] : Intel(R) Wireless Bluetooth(R)
- [Port11]
- [Port12]
- [Port13]
- [Port14]
- [Port15]
- [Port16]
- [Port17]
- [Port18]

Intel(R) USB 3.1 eXtensible Host Controller - 1.10 (Microsoft)

- USB Root Hub (USB 3.0)
- HUB [Port1] : Generic USB 2.0 Hub
- [Port2]
- [Port3] : LAN9512/LAN9514 USB 2.0 to Ethernet 10/100 Adapter #3
- HUB [Port3] : Generic USB 2.1 Hub
- [Port1]
- [Port2]
- [Port3]
- [Port4]
- HUB [Port3] : Generic SuperSpeed USB Hub
- [Port1]
- [Port2]
- [Port3]
- [Port4]

----- USB Port3 -----

Connection Status : 0x01 (Device is connected)
Port Chain : 2-3
Properties : 0x0B
IsUserConnectable : yes
PortIsDebugCapable : yes
PortHasMultiCompanions : no
PortConnectorIsTypeC : yes
ConnectionIndex : 0x03 (Port 3)
CompanionIndex : 0
CompanionHubSymLnk : USB#ROOT_HUB30#7#35bf1ebd#0#0#{f18a0e88-c30c-11d0-8815-00a0c906bed8}
CompanionPortNumber : 0x01 (Port 1)
-> CompanionPortChain : 2-1

----- Summary -----

1 Vendor ID : 0x04B4 (Cypress Semiconductor)

2 Device Connection Speed : SuperSpeed

----- USB Hub -----

+++++ Device Information +++++

Device Description : Generic SuperSpeed USB Hub
Device Path : \\?\USB#VID_04B4&PID_6504&MSFT30123456789A#{f18a0e88-c30c-11d0-8815-00a0c906bed8}\Device\USBPDO-9
 : USB\VID_04B4&PID_6504&MSFT30123456789A
 : USB\VID_04B4&PID_6504&REV_5000 USB\VID_04B4&PID_6504
 : {36fc9e60-c465-11cf-8056-444553540000}\0012 (GUID_DEVCLASS_USB)
 : \SystemRoot\System32\drivers\UsbHub3.sys (Version: 10.0.19041.964 Da
 : C:\WINDOWS\inf\usbhub3.inf

Legacy BusType : PNPBus
Class : USB
Class GUID : {36fc9e60-c465-11cf-8056-444553540000} (GUID_DEVCLASS_USB)

The USB3.x HUB of UCX

The USB3.x HUB of UCX


The USB3.x HUB of UCX

Windows






- ✓ Open on macOS BYOD the USB Device Tree utility (Apple logo/About this Mac/System Report/Hardware/USB)
- ✓ **(1)** Locate the UCX USB2.0 HUB
Name: CY-HX3 HUB
Vendor ID: 0x04B4
(Cypress Semiconductor)
- ✓ **(2)** If the hub is visible and the Speed is Up to 480 Mb/s, **USB2.0 enumeration works ✓**

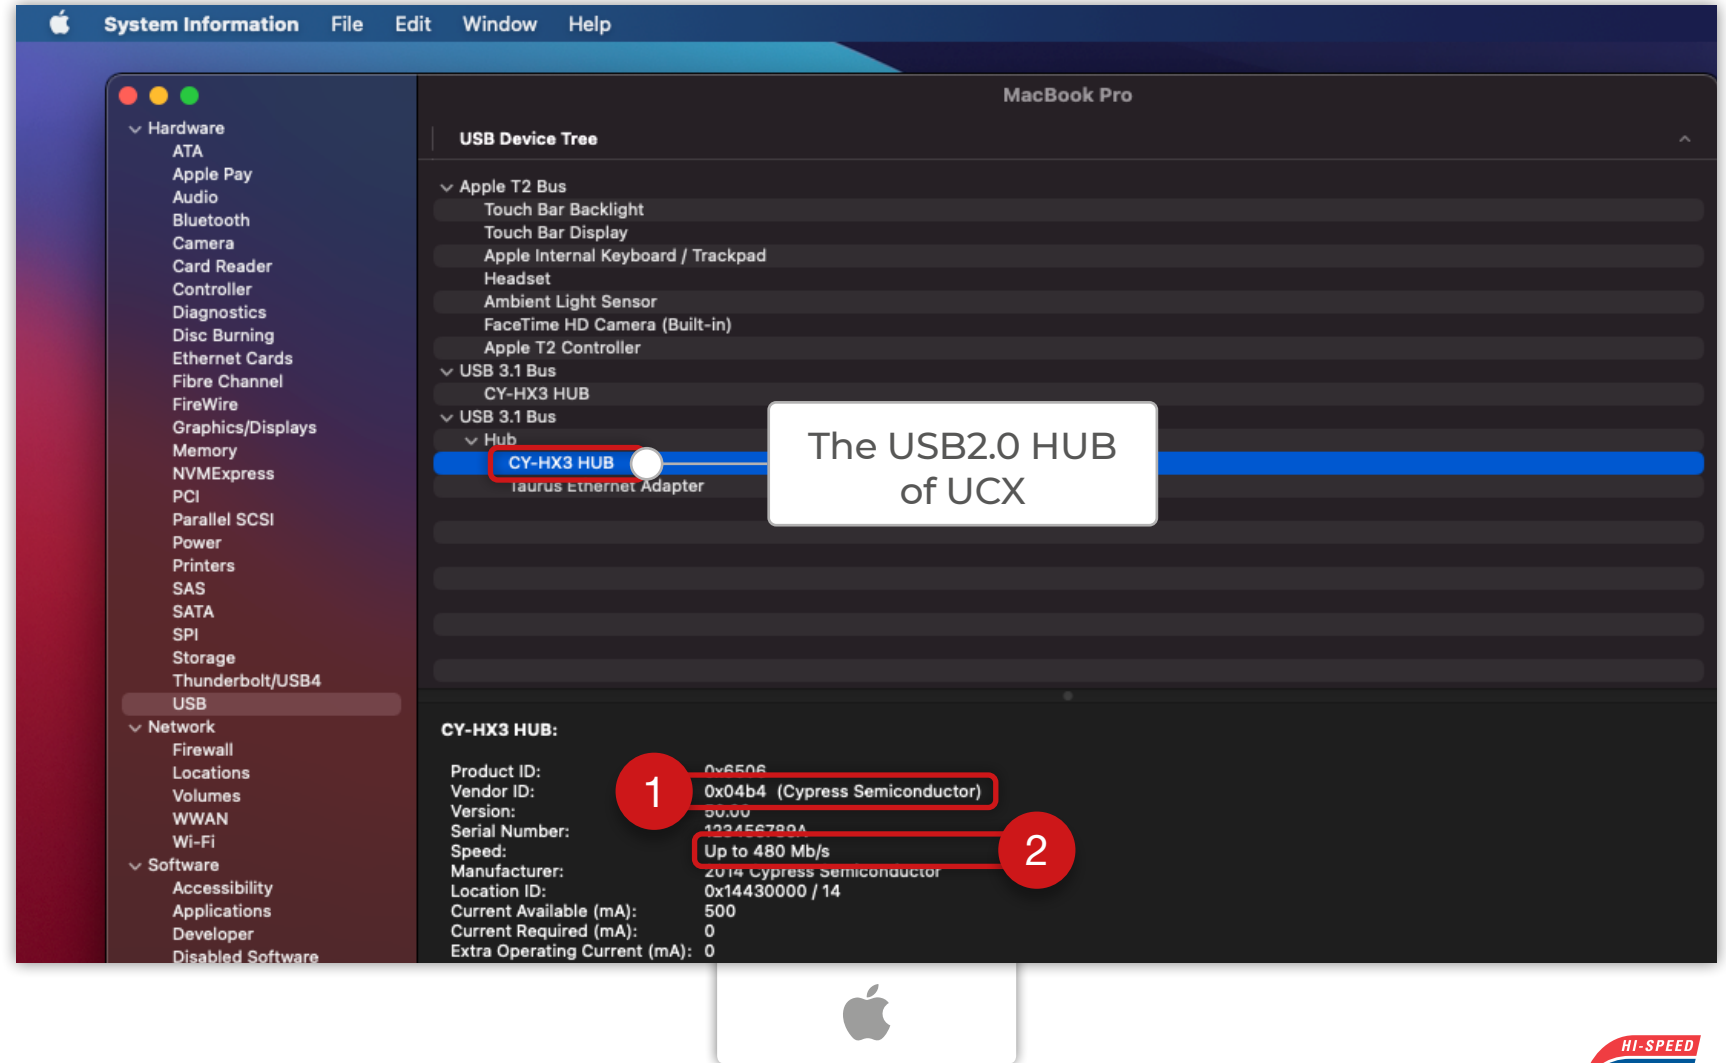



- ✓ Open on macOS BYOD the USB Device Tree utility (Apple logo/About this Mac/System Report/Hardware/USB)
- ✓ **(1)** Locate the UCX USB 3.x HUB
Name: CY-HX3 HUB
Vendor ID: 0x04B4
(Cypress Semiconductor)
- ✓ **(2)** If the hub is visible and the Speed is Up to 5 Gb/s, **USB3.x enumeration works** ✓

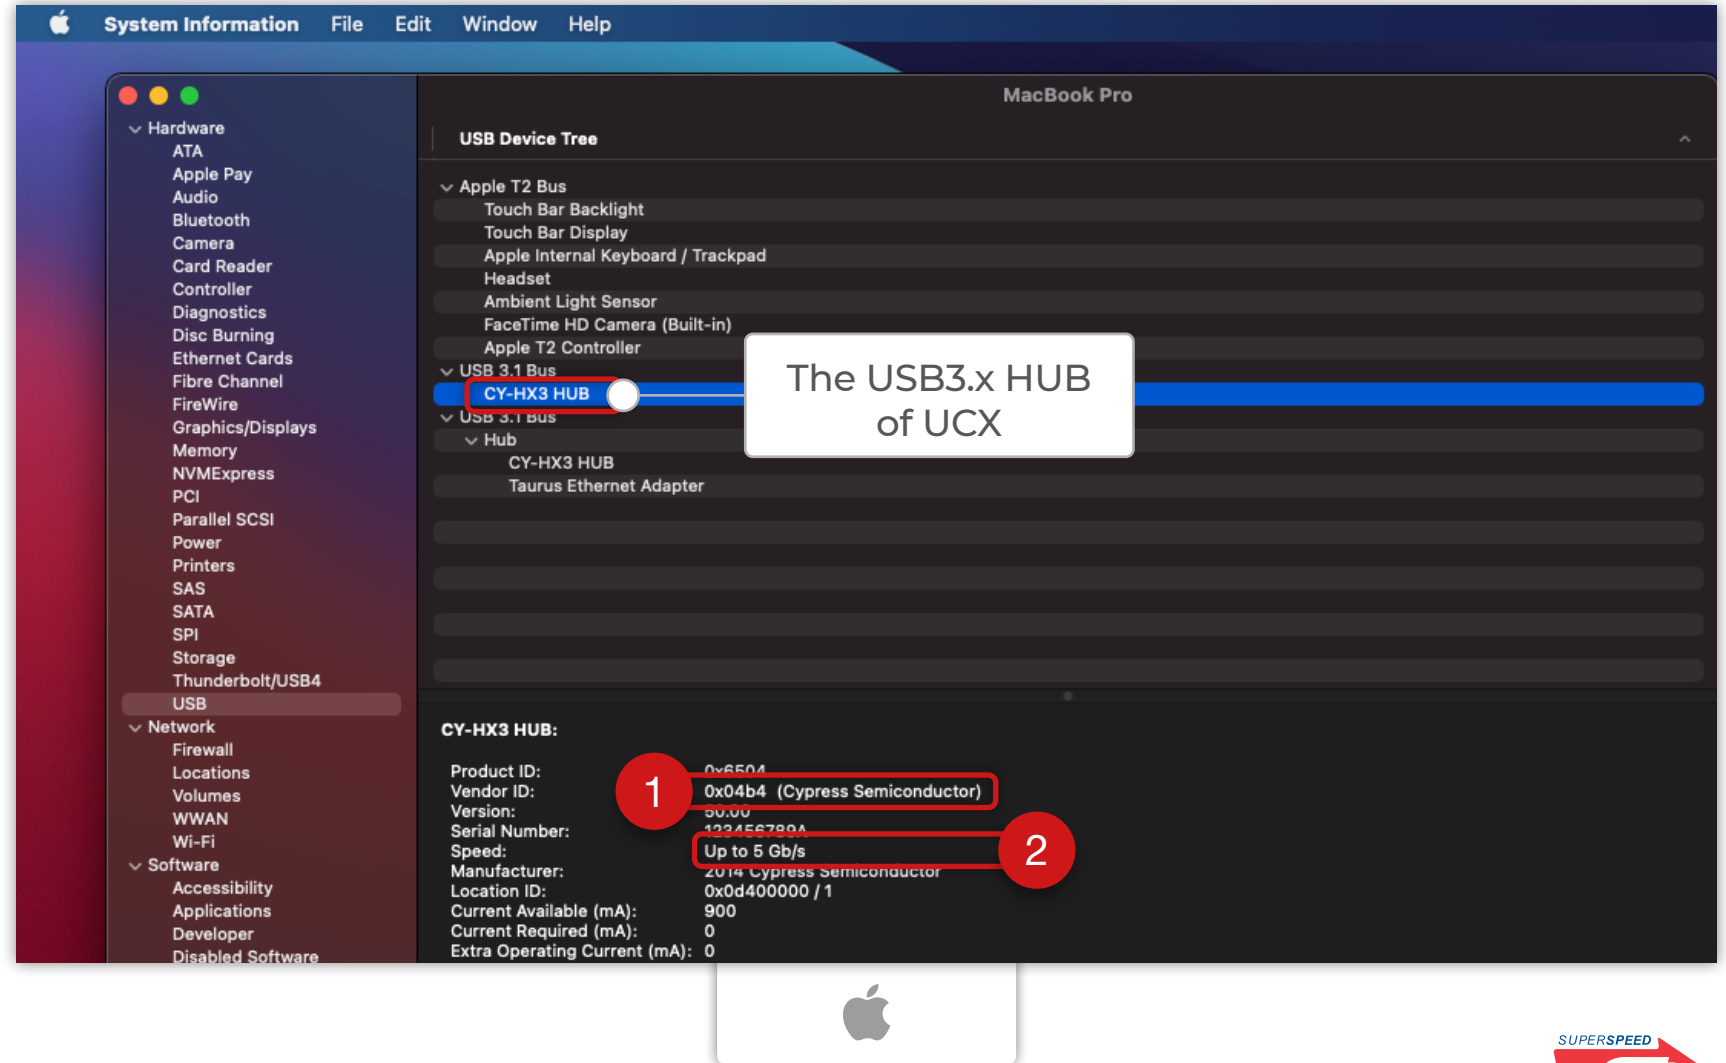

- ✓ (1) Clicking on the USB-C HOST 1 icon in USB crosspoint tab results that USB Upstream Port 1 properties window opens
- ✓ (2) Set the USB-C Power Limit to Port 1 maximum, Port 2 minimum
- ✓ (3) If the Charging states shows Charging, **Power Delivery works** ✓

The screenshot displays the Lightware Device Controller v2.5.11b3 interface. The main window is titled "TAURUS UCX" and shows a "USB" tab. A red box labeled "1" highlights the "USB-C HOST 1" icon in the "USB" section. A second red box labeled "2" highlights the "USB-C Power Limit" dropdown menu in the "GENERAL" section, which is set to "Port 1 maximum, Port 2 minimum". A third red box labeled "3" highlights the "Charging state" dropdown menu in the "SETTINGS" section, which is set to "Charging".

Lightware Device Controller v2.5.11b3 - LW_UCX-4x2-HC30_AC184940

TAURUS UCX LW_UCX-4x2-HC30_AC184940

CROSSPOINTS EDID MANAGEMENT CONTROL SETTINGS Device Discovery

Video & Audio USB

USB

USB-C HOST 1 U1 USB-C HOST 2 U2 USB-B HOST 3 U3 USB-B HOST 4 U4 USB HUB H1

USB UPSTREAM PORT 1 - USB-C HOST 1

GENERAL

Port name: USB-C Host 1

Lock: Lock

Connected:

USB-C Power Limit: Port 1 maximum, Port 2 minimum

SETTINGS

Host Supports DP Alt Mode:

Active Alternate Mode: DP

Active DP Alternate Mode Pins: Pin Assignment D

DP Alternate Mode Policy: Prefer USB3.1

Charging state: Charging

VBUS Voltage: 4.80 V

Nominal VBUS Voltage: 5.00 V

Max VBUS Current: 3.00 A

Active Port Data Role: UFP


Active Port Power Role: Source

Port Power Role: Dual Role



PREPARATION FOR TESTING 4 LANE DISPLAYPORT ALTERNATE MODE

- ✓ **(1)** Clicking on the USB-C IN 1 icon in Video crosspoint tab results that Input 1 port properties window opens
- ✓ **(2)** Set the DP Alternate Mode Policy to Prefer Video
- ✓ **(3)** Check the status of the Host Supports DP Alt Mode

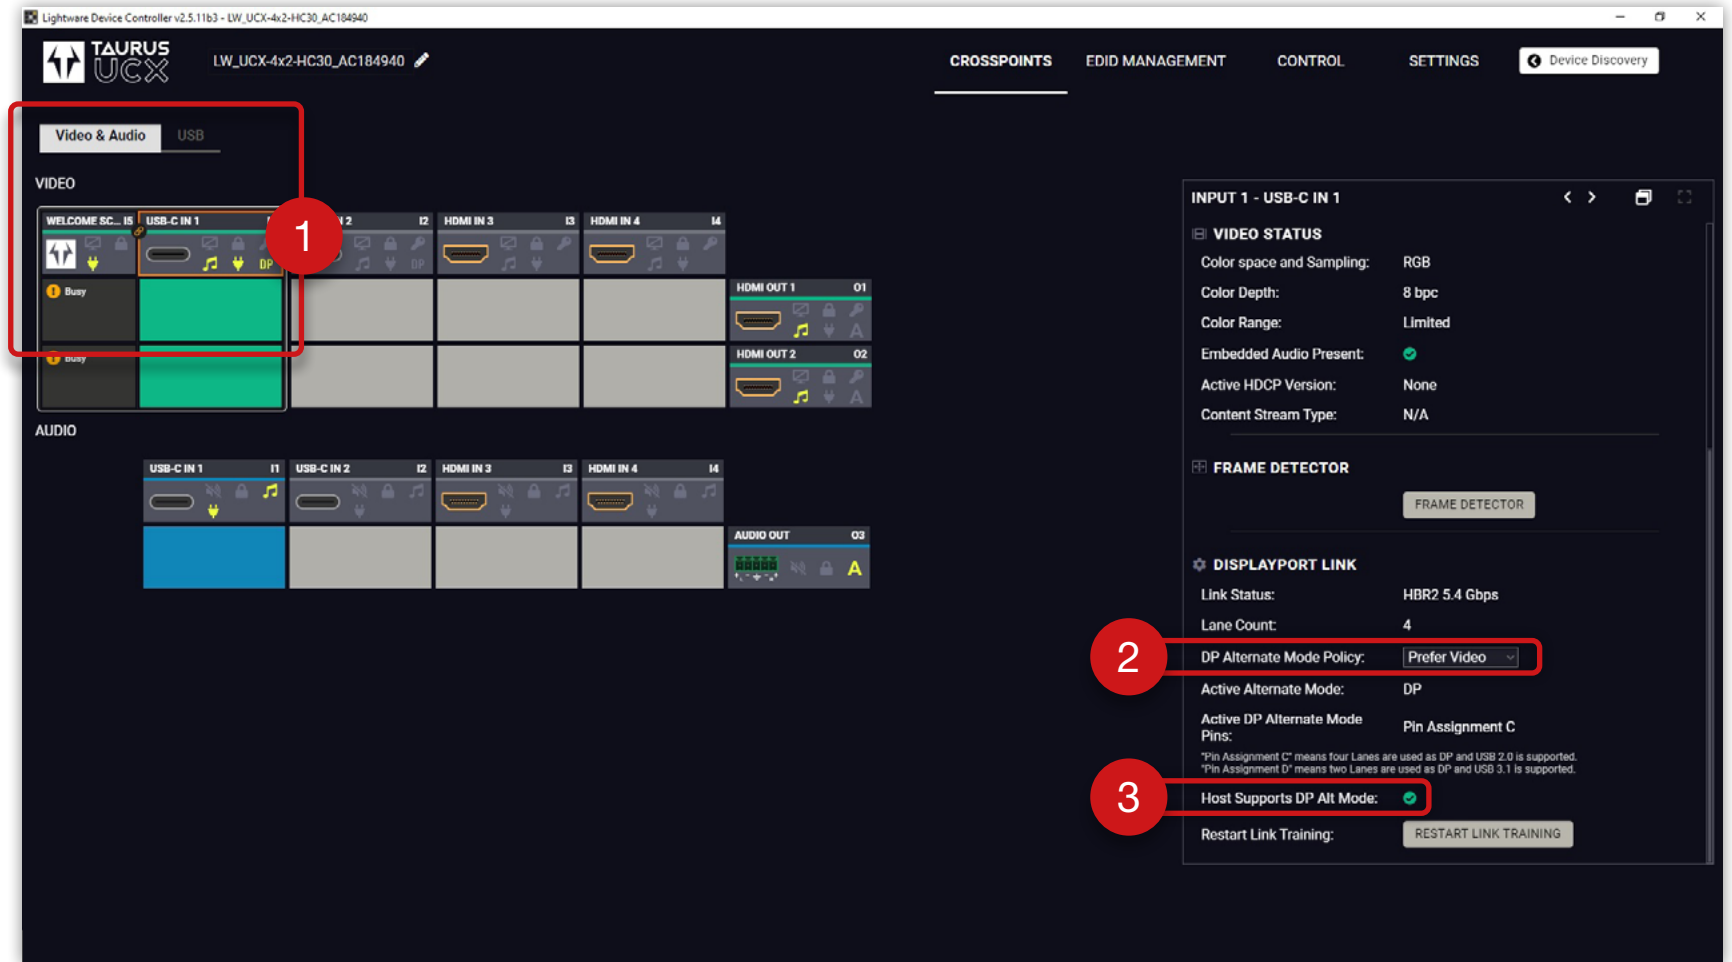

If the status is ✓ BYOD is suitable for testing DP Alt mode
If the status is ✗ BYOD is non-suitable for testing the DP Alt mode





PREPARATION FOR TESTING 4 LANE DISPLAYPORT ALTERNATE MODE


- ✓ Set the F137 factory EDID to E1 (USB-C in 1) in EDID management tab

In case BYOD does not support the 3840x2160p60Hz, use F119 EDID (3840x2160p30Hz) or F47 EDID (1920x1080p60Hz)

Memory	Manufacturer	Resolution	Audio	Monitor Name	Source
F119	LWR	3840x2160p30.00Hz	2chLPCM,8chLPCM,DD...	Univ_4K_ALL	
F120	LWR	3840x2160p60.00Hz	2chLPCM	H_UHDp60_420	
F121	LWR	1440x1080p59.91Hz	2chLPCM	H1440x1080p60	
F122	LWR	2560x2048p59.98Hz	2chLPCM	H2560x2048p60	
F123	LWR	1280x800p59.91Hz	2chLPCM	H1280x800p60	
F124	LWR	1440x900p59.90Hz	2chLPCM	H1440x900p60	
F125	LWR	1366x768p60.00Hz	2chLPCM	H1366x768p60	
F126	LWR	1600x900p59.98Hz	2chLPCM	H1600x900p60	
F127	LWR	2048x1080p60.00Hz	2chLPCM	H2048x1080p60	
F128	LWR	2560x1080p60.00Hz	2chLPCM	H2560x1080p60	
F129	LWR	3440x1440p24.99Hz	2chLPCM	H3440x1440p25	
F130	LWR	3440x1440p29.99Hz	2chLPCM	H3440x1440p30	
F131	LWR	4096x2160p25.00Hz	2chLPCM	H4096x2160p25	
F132	LWR	4096x2160p30.00Hz	2chLPCM	H4096x2160p30	
F133	LWR	4096x2160p60.00Hz	2chLPCM	4Kp60_420	
F134	LWR	3440x1440p23.99Hz	2chLPCM	H3440x1440p24	
F135	LWR	4096x2160p24.00Hz	2chLPCM	H4096x2160p24	
F136	LWR	3840x2160p60.00Hz	2chLPCM	H2_UHD_PCM	
F137	LWR	3840x2160p60.00Hz	2chLPCM	HUHDp60_444	F137
F138	LWR	3840x2160p60.00Hz	2chLPCM	H2_UHD_PCM	
F139	LWR	3840x2160p60.00Hz	2chLPCM	H2_UHD_PCM	
F140	LWR	3840x2160p60.00Hz	2chLPCM,8chLPCM,DD...	H2_UHD_ALL	
F141	LWR	4096x2160p60.00Hz	2chLPCM	H4Kp60_444	
F142	LWR	4096x2160p50.00Hz	2chLPCM	H4Kp50_444	
F143	LWR	4096x2160p60.00Hz	2chLPCM	H2_4K_PCM	
F144	LWR	4096x2160p60.00Hz	2chLPCM,8chLPCM,DD...	H2_4K_ALL	
F145	LWR	2560x2048p49.97Hz	2chLPCM	H2560x2048p50	
F146	LWR	3840x2160p60.00Hz	2chLPCM	H2_UHD_HDR	
F147	LWR	3840x2160p60.00Hz	2chLPCM	H2_UHD_RB_PCM	
F148	LWR	3840x2160p60.00Hz	2chLPCM,8chLPCM,DD...	H2_UHD_RB_ALL	



- ✓ (1) Clicking on the USB-C IN 1 icon in Video crosspoint tab results that Input 1 port properties window opens
- ✓ (2) Check the Link status and the Lane Count
- ✓ If the Link status is HBR2 5.4 Gbps and the Lane Count is 4, **4 Lane DisplayPort Alt mode works** ✓

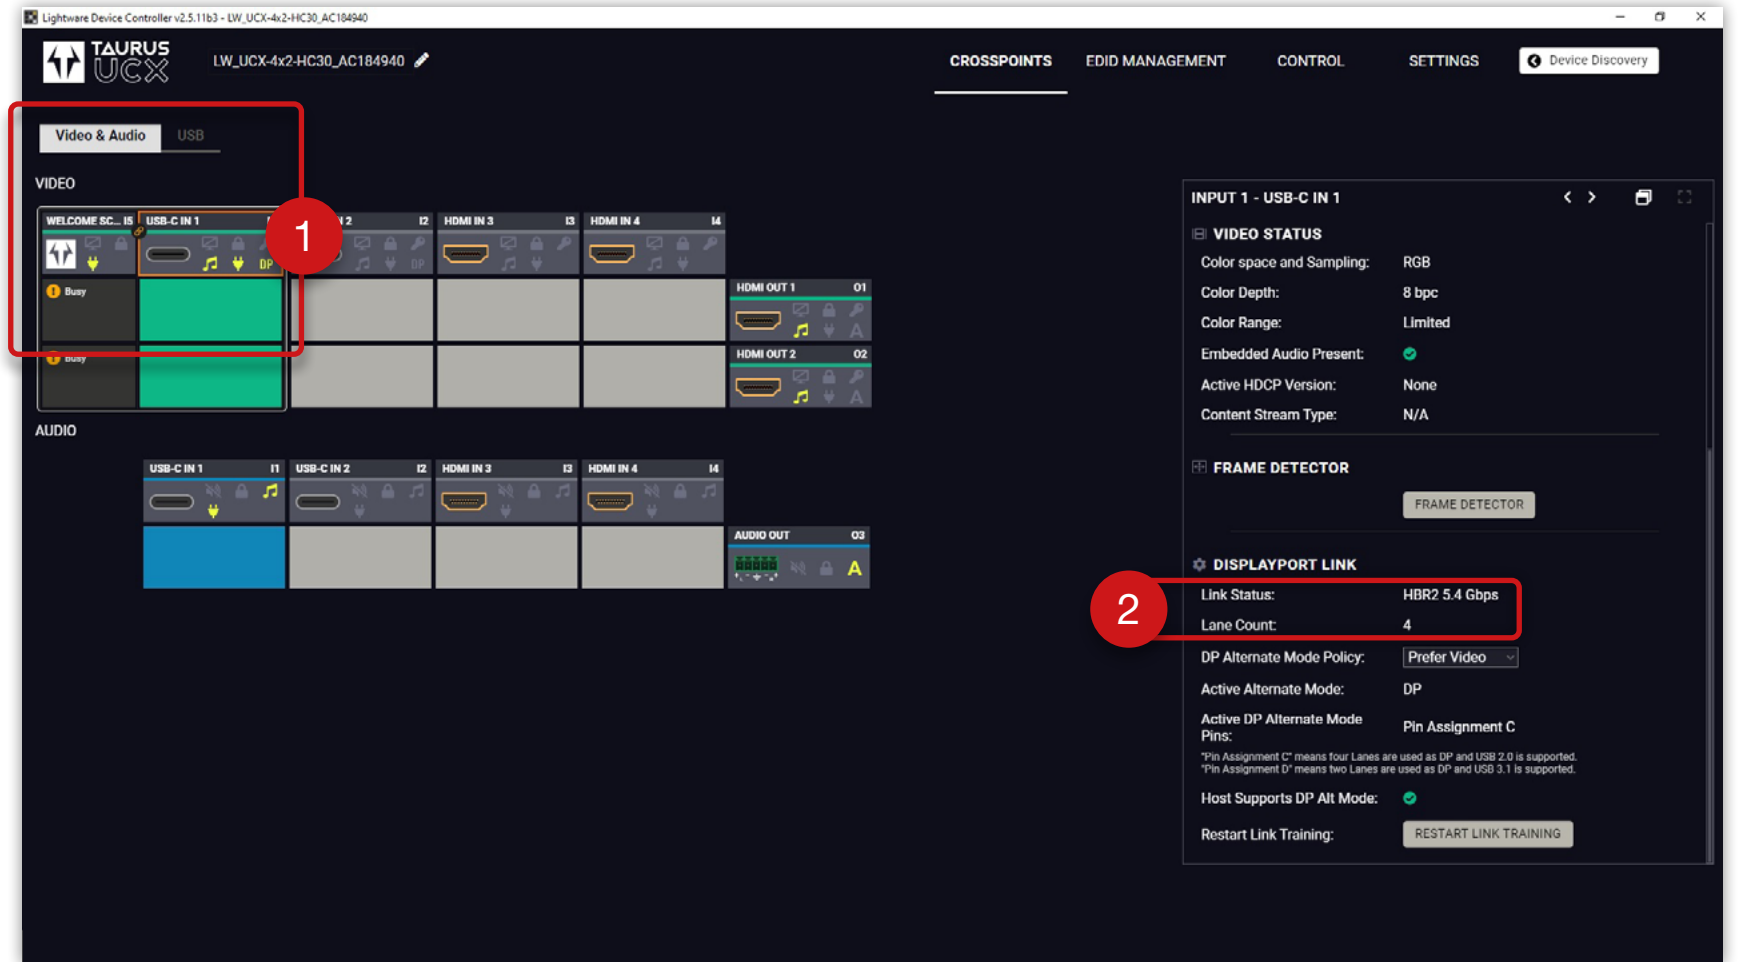



TESTING USB - ETHERNET BRIDGE

- ✓ In case the USB2.0 enumeration works then USB – Ethernet Bridge test is available
- ✓ Turn off the Wi-Fi connection on BYOD
- ✓ Launch a browser, open a website (eg. lightware.com), and refresh the website by clearing the cache



Control

F5

Chrome and Firefox



Option

F5

E

Safari

- ✓ If the web page is loaded, Ethernet works ✓

