
**ETL Verified IEC 61156-5 CATEGORY 7
S/FTP CABLE 4 PAIR 23AWG LSZH PS17032135**

Lightware Testing Lab

Cable Testing Method



Professional Cable Performance Analysis

We use Fluke DSX-5000 cable analyzers in the Lightware Testing Lab to measure the properties of the cable relevant to signal transmission. Measured data include the DC resistance of the cable, the loss of signal strength of a signal (attenuation) at one or more frequencies, measuring the isolation between pairs of multi-pair cable threads, cross talk and many more.

This phase of testing can outline the general performance of the cable itself, without the modifying effects of a connected HDBaseT™ device.

Application Tests


Measuring the performance of CAT cables is generally important, but it is even more useful to test the cables in a system containing HDBaseT™ transmitters and receivers.

These devices along with the used cable greatly affect the overall system performance. HDBaseT™ transmitters and receivers have HDMI input/output stage, reclocking features and other factors that can modify system performance.

We believe that in order to provide the most valuable information for integrators about the HDBaseT™ chain, it is best to test the cables together with HDBaseT™ compatible Lightware TPS products.

Therefore we always run cable performance tests in working applications as well.

Test criteria: Bit Error Rate is under 10^{-9}

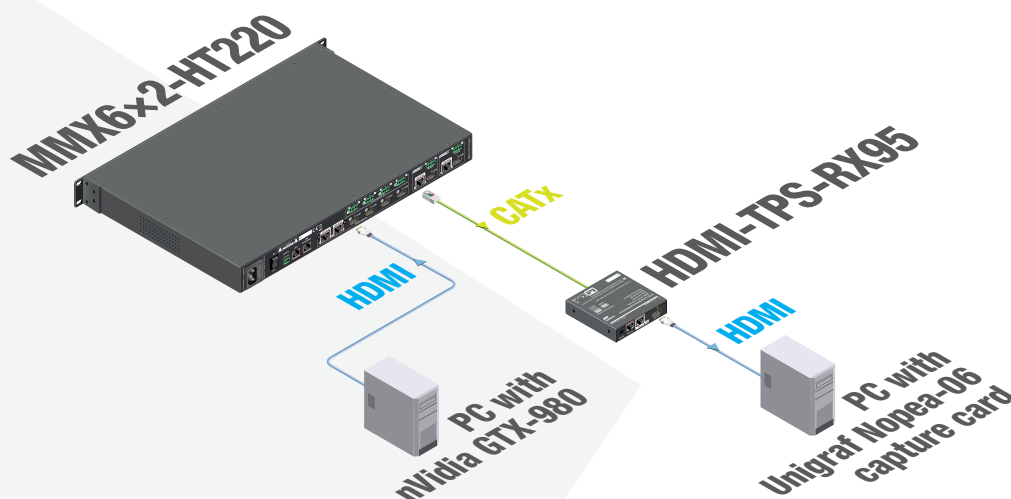

Test Results

Test Results					Pixel errors over 200 sec			
	TX	RX	Test Pattern	Length (m)	Red	Green	Blue	Total
Lightware Long Reach Mode	MMX6x2	HDMI-TPS-RX95 ENG-2068	1080p60 pseudorandom	160 m +2×2,5 m patch cable	3	3	7	13
HDBaseT™	MMX6x2	HDMI-TPS-RX95 ENG-2068	2160p30 pseudorandom	95 m +2×0,3 m patch cable	0	0	0	0

	Bit Error Rate				Tx Error Rate				Rx Error Rate			
	total_ber (tx side)	video_ber (rx side)	audio_ber (rx side)	control_ber (rx side)	A	B	C	D	A	B	C	D
Lightware Long Reach Mode	10 ⁻⁹	10 ⁻⁹	10 ⁻⁹	10 ⁻⁹	51	51	51	51	56	56	56	56
HDBaseT™	10 ⁻⁹	10 ⁻⁹	10 ⁻⁹	10 ⁻⁹	39	39	39	39	61	61	61	61



ETL Verified IEC 61156-5 CATEGORY 7 S/FTP CABLE 4 PAIR 23AWG LSZH PS17032135

Cable ID: 006



Date / Time: 2017-05-17 02:00:36 PM
Test Limit: Measure All (1200 MHz)
 Cable Type: Cat 7A S/FTP
 NVP: 78.0%

Software Version: V5.0 Build 3
 Limits Version: V5.0
 Calibration Date:
 Main (Module): 2017-02-07
 Remote (Module): 2017-02-07

Test Summary: PASS

Model: DSX-5000
 Main S/N: 2797178
 Remote S/N: 2797197
 Main Adapter: DSX-PLA004
 Remote Adapter: DSX-PLA004

Length (m)	[Pair 36]	93.1
Prop. Delay (ns)	[Pair 12]	402
Delay Skew (ns)	[Pair 12]	4
Resistance (ohms)	[Pair 12]	13.59
Resist. Unbal. (ohms)	[Pair 45]	0.046
Resist. P2P Unbal. (ohms)	[Pair 12-36]	0.021
Impedance (ohms)	[Pair 45]	106
Insertion Loss Margin (dB)	[Pair 12]	
Frequency (MHz)	[Pair 12]	1040.0
Limit (dB)	[Pair 12]	

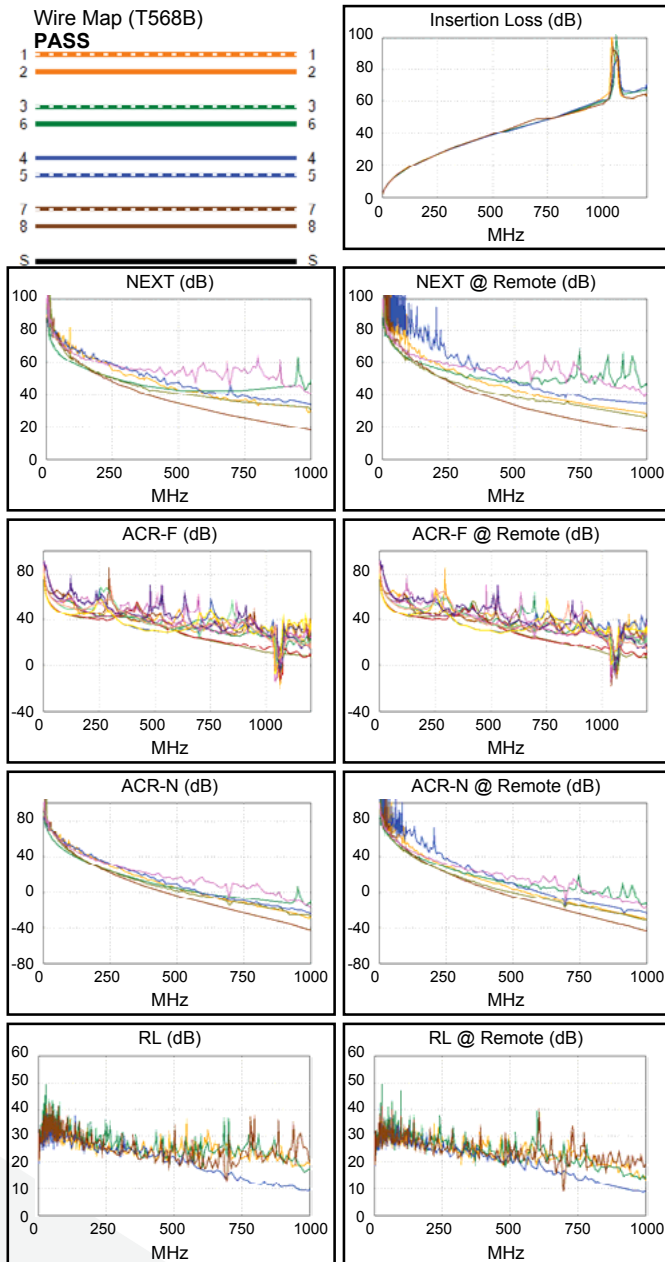

N/A	MAIN	SR	MAIN	SR
Worst Pair			12-36	45-12
ACR-F (dB)			-17.3	-15.9
Freq. (MHz)			1062.	1040.
Limit (dB)				
Worst Pair			36	12
PS ACR-F (dB)			-18.7	-17.2
Freq. (MHz)			1062.	1040.
Limit (dB)				

N/A	MAIN	SR	MAIN	SR
Worst Pair			36-45	36-45
ACR-N (dB)			-42.3	-43.1
Freq. (MHz)			999.0	999.0
Limit (dB)				
Worst Pair			45	45
PS ACR-N (dB)			-42.3	-43.1
Freq. (MHz)			999.0	999.0
Limit (dB)				

N/A	MAIN	SR	MAIN	SR
Worst Pair			45	45
RL (dB)			9.0	8.5
Freq. (MHz)			978.0	978.0
Limit (dB)				

Cable ID: 006

Date / Time: 2017-05-17 02:00:36 PM
Test Limit: Measure All (1200 MHz)
 Cable Type: Cat 7A S/FTP
 NVP: 78.0%

Software Version: V5.0 Build 3
 Limits Version: V5.0
 Calibration Date:
 Main (Module): 2017-02-07
 Remote (Module): 2017-02-07

Test Summary: PASS

Model: DSX-5000
 Main S/N: 2797178
 Remote S/N: 2797197
 Main Adapter: DSX-PLA004
 Remote Adapter: DSX-PLA004

Worst Case Margin			Worst Case Value	
N/A	MAIN	SR	MAIN	SR
Worst Pair			12	45
TCL (dB)			15.7	14.7
Freq. (MHz)			992.0	564.0
Limit (dB)				
N/A	MAIN	SR	MAIN	SR
Worst Pair			36	36
TCTL (dB)			30.5	30.6
Freq. (MHz)			39.8	39.8
Limit (dB)				
N/A	MAIN	SR	MAIN	SR
Worst Pair			36-78	12-36
CDNEXT (dB)			19.5	19.2
Freq. (MHz)			979.0	777.0
Limit (dB)				
N/A	MAIN	SR	MAIN	SR
Worst Pair			36	36
CMRL (dB)			4.4	4.2
Freq. (MHz)			1000.	957.0
Limit (dB)				
N/A	MAIN	SR	MAIN	SR
Worst Pair			12	12
ELTCTL (dB)			-24.6	-26.2
Freq. (MHz)			1040.	1040.
Limit (dB)				

